


INSTRUMENT



NO.	ITEM	TYPE	Qty
1	Double Drill Guide	Φ 2.7 / Φ 1.2	1
2	Quick Coupling Handle	I-Handle	2
3	Guide Wire		3
4	Guide Wire	Threaded	3
5	Cannulated Drill Bit	Φ 2.7	2
6	Depth Gauge	80mm	1
7	Cannulated Tapper	Φ 4.0	1
8	Countersink Driver Shaft		1
9	Washer Clip		1
10	Cannulated Driver	Φ 2.5	1
11	Power Driver Shaft	Φ 2.5	1

CCS 4.0
Cannulated Screw System

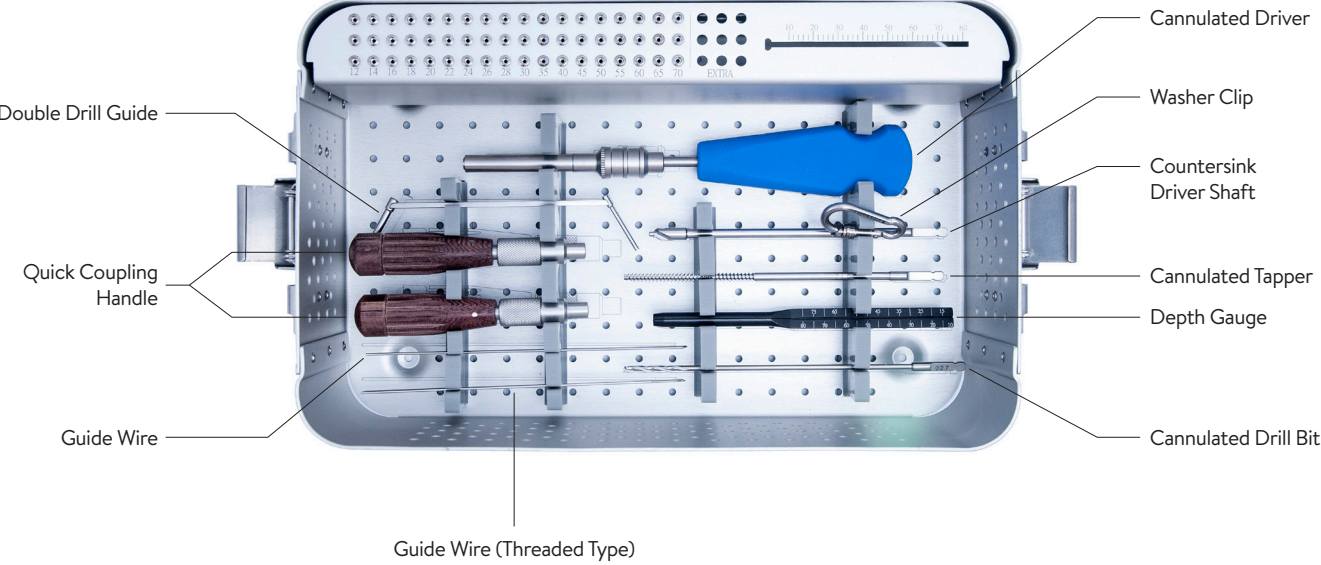

Adress: #503, Science Tower, 97, Dongducheon-ro, Dongducheon-si,
Gyeonggi-do, Korea
Tel: +82-31-826-6176 Fax: +82-31-697-2373



CCS 4.0
Cannulated
Screw System

Features

- Easy and Fast insertion and removal
- Resistance to pullout
- Diverse selection of the screw length
- Self-Drilling and Self-Tapping
- Low Profile

Distributed by :




FEATURES OF CCS 4.0
CANNULATED SCREW SYSTEM



- CANNULATED SHAFT ACCEPTS 1.25MM GUIDE WIRES
- 32.5 AND 37.5MM LENGTH SCREWS ARE AVAILABLE FOR MOST OPTIMAL LENGTH SELECTION IN THE MOST FREQUENT USAGE RANGE.
- CANCELLOUS THREADED PROFILE USES DEEP CUTTING THREADS WITH A LARGE PITCH ENSURE THE RESISTANCE TO PULLOUT.
- SELF-DRILLING, SELF-TAPPING SCREW TIP FACILITATES SCREWS INSERTION, PREDRILLING AND TAPPING IS NOT REQUIRED IN MOST CASES.
- LOW-PROFILE HEAD REDUCES POSSIBILITY OF SOFT TISSUE IRRITATION.

SPECIFICATION OF CCS 4.0
CANNULATED SCREW SYSTEM

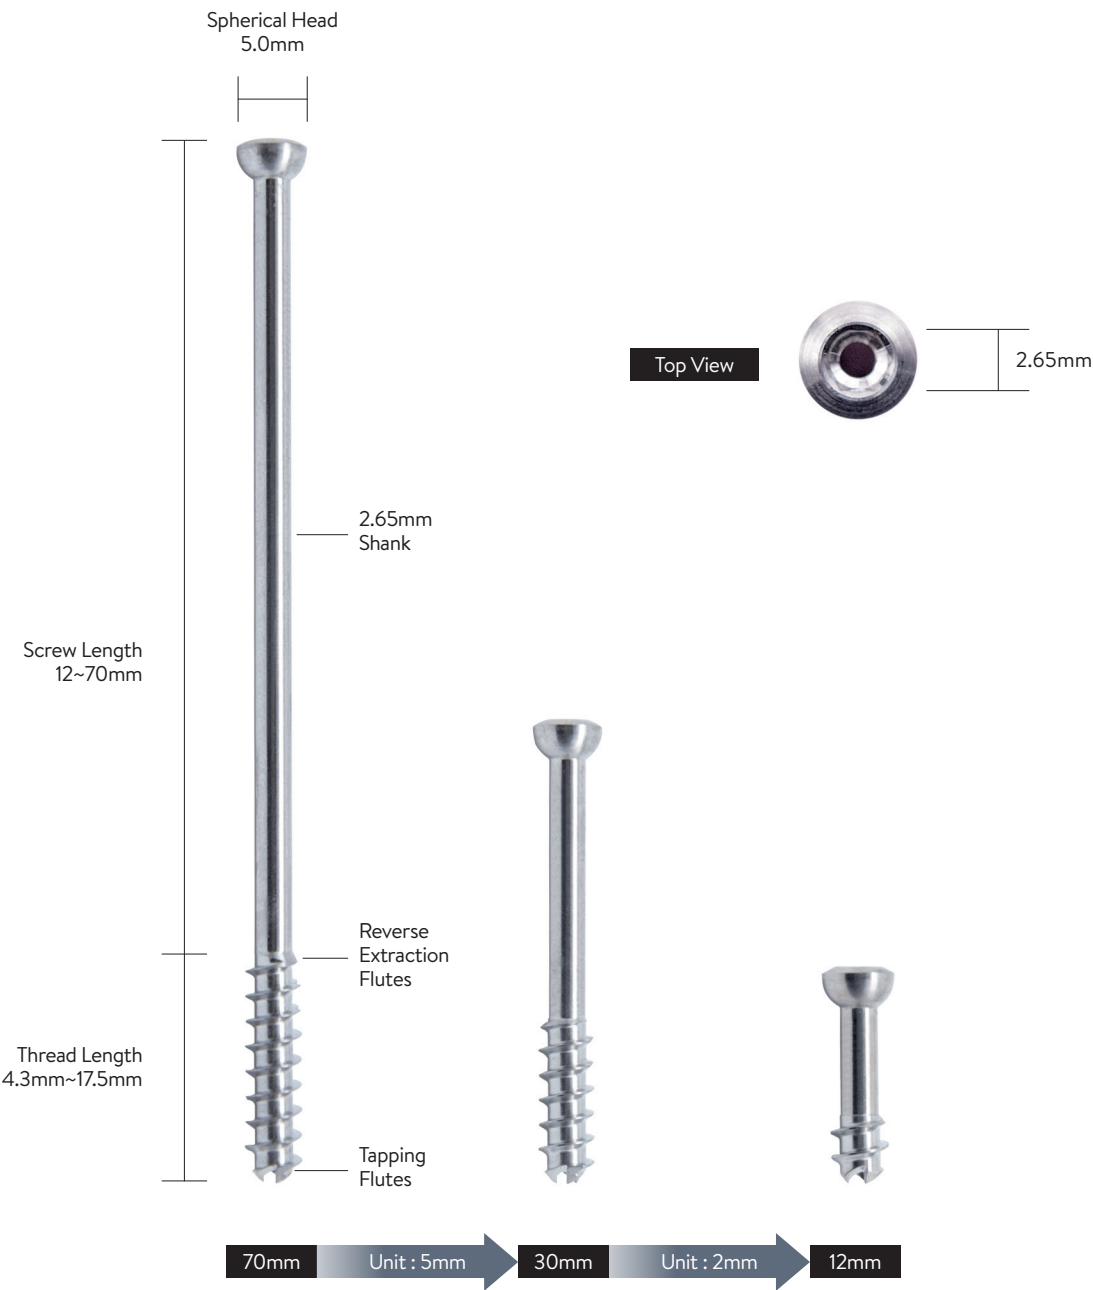

INFORMATION OF CCS 4.0
CANNULATED SCREW SYSTEM

NO.	ITEM	ITEM CODE	SIZE
1	4.0 Cannulated Screw	BCN4012	12mm
2		BCN4014	14mm
3		BCN4016	16mm
4		BCN4018	18mm
5		BCN4020	20mm
6		BCN4022	22mm
7		BCN4024	24mm
8		BCN4026	26mm
9		BCN4028	28mm
10		BCN4030	30mm
11		BCN4032	32.5mm
12		BCN4035	35mm
13		BCN4037	37.5mm
14		BCN4040	40mm
15		BCN4042	42.5mm
16		BCN4045	45mm
17		BCN4047	47.5mm
18		BCN4050	50mm
19		BCN4055	55mm
20		BCN4060	60mm
21		BCN4065	65mm
22		BCN4070	70mm
23		BCN4075	75mm
24		BCN4080	80mm